




Quadra Specification Sheet

Boiling & Chilled Filtered Water System

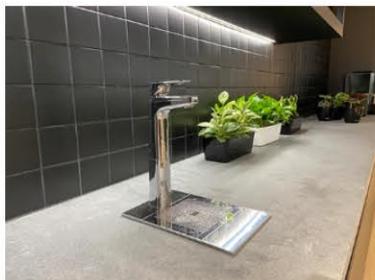

Product Code	Model Name	Capacity (no. of pax)	Boiling Water Recovery Rate (cups/hour)	Chilled Water Recovery Rate (cups/hour)	Height (mm)	Width (mm)	Depth (mm)
904010	Quadra Compact	up to 20 pax	100 cups/hour	150 cups/hour	340	315	365
904060	Quadra 460	up to 60 pax	180 cups/hour	175 cups/hour	340	315	465
904100	Quadra 4100	up to 100 pax	250 cups/hour	175 cups/hour	340	315	465
904180	Quadra 4180	up to 180 pax	350 cups/hour	175 cups/hour	340	315	465

Note: 1 cup = 170ml

Available Type of Dispenser & Colour/Finish



XL Levered

- XLCH: Chrome
- XLBR: Brushed Chrome
- XLMB: Matte Black
- XLMW: Matte White
- XLRG: Rose Gold



XT Touch

- XTCH: Chrome
- XTBR: Brushed Chrome
- XTMB: Matte Black

Accessories



XI Font & 120mm Dispenser Riser

Product Code

- 992803CH: Chrome
- 992803BR: Brushed Chrome
- 992803MB: Matte Black
- 992803MW: Matte White
- 992803RG: Rose Gold (only center grille piece is in Chrome finish)




Tap & Font Specifications


Quadra series




XL Levered Dispenser with 120mm Riser

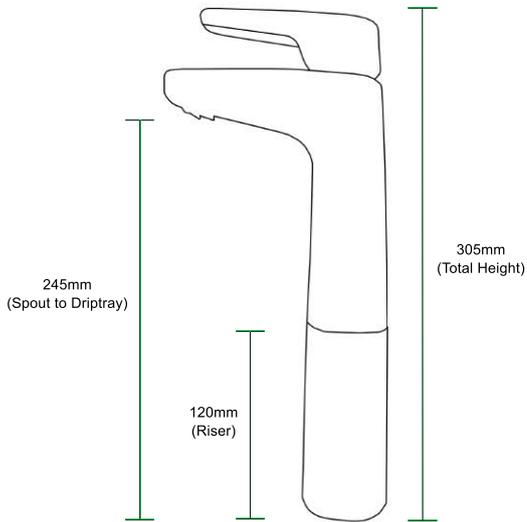

XT Touch Dispenser with 120mm Riser

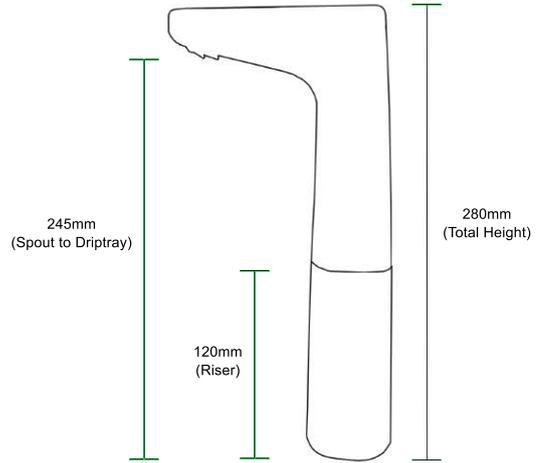

XI Font

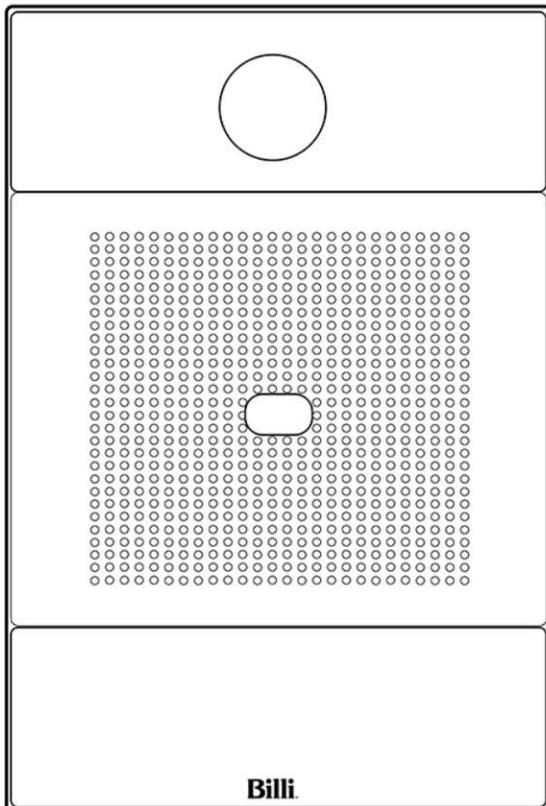

Font External Size

190mm(W) x 290mm(D)

Font Cut-out Size (Proud/Surface Mount)

174mm(W) x 274mm(D)

Font Cut-out Size (Flush Mount)

Please contact supplier.



Installation Requirements

Quadra series

Billi™

Power Supply

Quadra Compact: 13amp power point to be provided.

Quadra 460: 13amp power point to be provided.

Quadra 4100: 15amp power point to be provided.

Quadra 4180: 20amp power point (single phase) to be provided.

Water Supply

1/2" miniball valve (male) to be provided.

Drainage Point

Required. See sample image below.

Table Top Cut-out

With Font

a) Proud/Surface Mount (recommended): 174mm(W) x 274mm(D) cut-out to be provided.

b) Flush Mount: please contact supplier.

Without Font (tap install at sink)


35mm diameter hole to be provided. Distant between the center of hole to the edge of sink is 50mm.

Minimum Cabinet Space

560mm(H) x 420mm(W) x 550mm(D) to be provided.



Optional - drainage point with bottle trap (connection to be completed by your contractor)

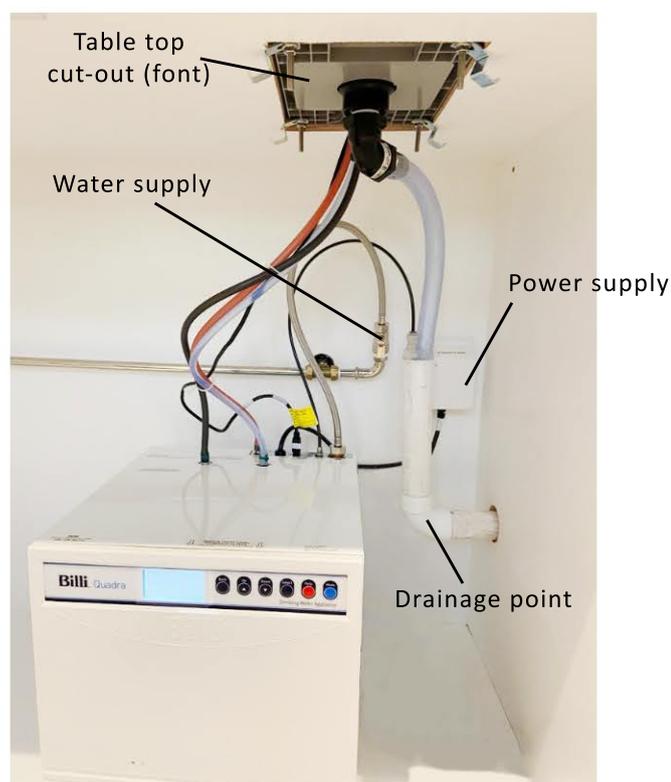

Appointed Distributor in Singapore & Malaysia



Eldric Marketing Pte Ltd

5 Pereira Road

#02-01, Asiawide Industrial Building

Singapore 368025

Contact Details

Commercial Projects:

Weesheng@eldric.sg

9006 3583

Residential Projects:

Herman@eldric.sg

9790 2636